






鍍射D/C:




Plug 機殼相關尺寸示意圖

NOTES:

- MATERIAL:
 - 1.1 HOUSING: PA9T UL94V-0; COLOR:BLACK HALOGEN FREE
 - 1.2 CONTACTS: PHOSPHOR BRONZE.
 - 1.3 SHELL: STAINLESS STEEL SUS304.
- FINISH:
 - 2.1 CONTACTS: PLATED GOLD FLASH ON CONTACT AREA. MATTE-TIN 80u" Min ON SOLDER TAIL. NICKEL 50u" Min UNDERPLATED OVERALL.
 - 2.2 SHELL: NICKEL 50u" PLATED.
- SPECIFICATION:
 - 3.1 DIELECTRIC STRENGTH:AC 500V FOR ONE MINUTE
 - 3.2 INSULATOR RESISTANCE:100MΩ min. AT DC 100V
 - 3.3 CONTACT RESISTANCE:45mΩ MAX
 - 3.4 CURRENT RATING:500mA
 - 3.5 OPERATING TEMPERATURE:-30 °C ~+85 °C

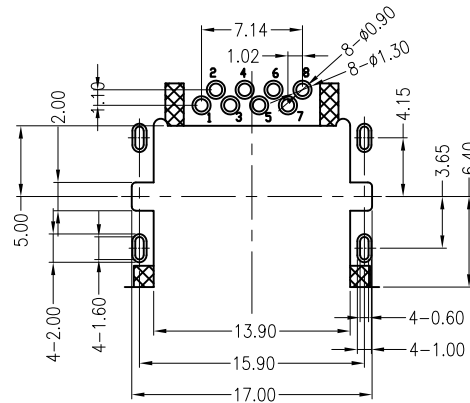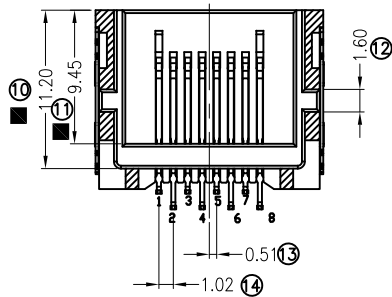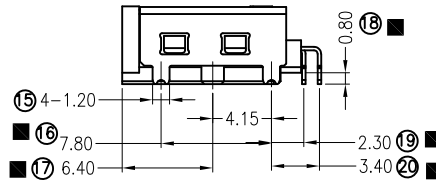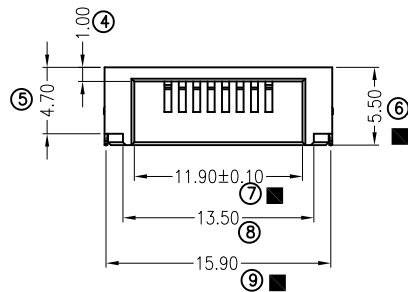

RECOMMENDED PCB LAYOUT
TOL:±0.05 PCB T: 1.00±0.05 (TOP VIEW)

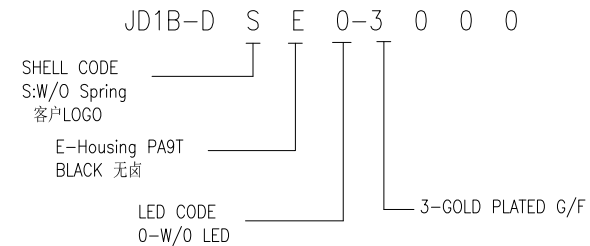

REV.	ECN. NO.	DRAWN	DATE	EC.content
A.0	NEW	Victor	04/10/2024	-
A.1		Victor	08/04/2025	修改STAND OFF面



APPROVED	CHECKED	DRAWN	UNIT: mm	SCALE: 1:1	SHEET: 1/1	REV.: A.1

⊗: QUALITY CONTROL ITEM
 GENERAL TOLERANCE
 .X±0.38 X.'±2'
 .XX±0.20 .X'±1'
 .XXX±0.13
 PART NO.: JD1B-DSE0-3000
 TITLE:RJ45 Jack
 W/O LED W/SHELL