

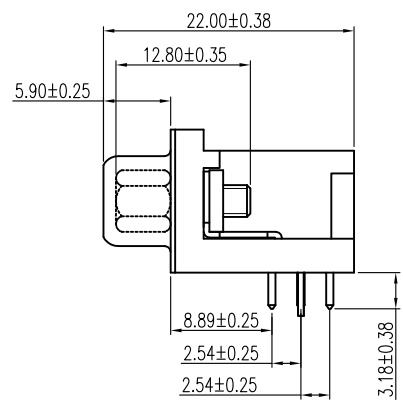
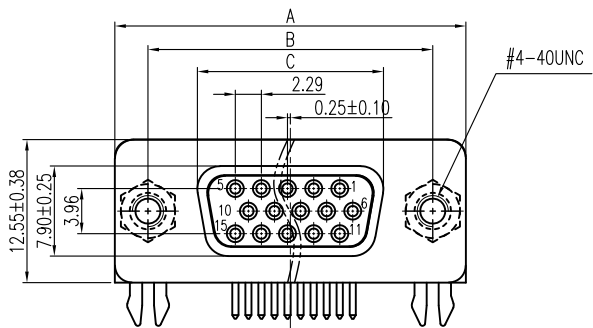


1 2 3 4 5 6 7 8

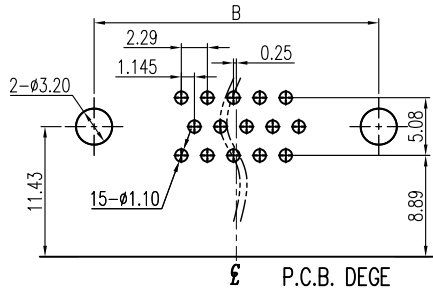


1.NOTE:  
 INSULATOR:PBT+30% GF UL 94V-0.  
 SHELL:SPCC.  
 TERMINAL: C2680.  
 HARPOON: SPCC.  
 SCREW: C3604 (符合RHOS豁免条款6C含量要求)  
 RIVET: C3604 (符合RHOS豁免条款6C含量要求)  
 2.PLATING  
 TERMINAL: GOLD FLASH PLATED ON CONTACT AREA.  
 NICKL 50u" MIN UNDERPLATING OVER ALL.  
 TIN 100u" MIN PLATED ON SODERING TAIL.  
 HARPOON: 80u"MIN. TIN PLATED.  
 SHELL: NI 50u" MIN PLATED.  
 SCREW: NI 50u" MIN PLATED  
 RIVET: NI 40u" MIN PLATED  
 2.ELECTRICAL CHARACTERISTICS  
 CURRENT RATING:3.0 AMP DC  
 VOLTAGE RATING:250 V DC  
 CONTACT RESISTANCE:30 MILLIOHMS MAX.  
 DIELECTRIC WITHSTANDING VOLTAGE:1000 V AC MIN.  
 INSULATION RESISTANCE:1000 MEGAOHMS MIN.  
 3.ENVIRONMENTAL  
 OPERATING TEMPERATURE:-55°C ~ +85°C  
 STORAGE TEMPERATURE:-55°C ~ +105°C

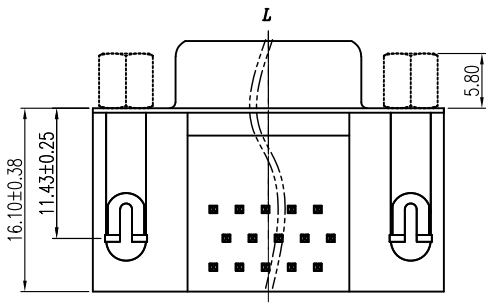

RECOMMENDED P.C.B. LAYOUT

	15	30.81	24.99	16.33
√	26	39.14	33.32	24.66
	44	53.04	47.04	38.38
	62	69.32	63.50	54.84
选购规格	No. of Contact	A±0.38	B±0.25	C±0.25

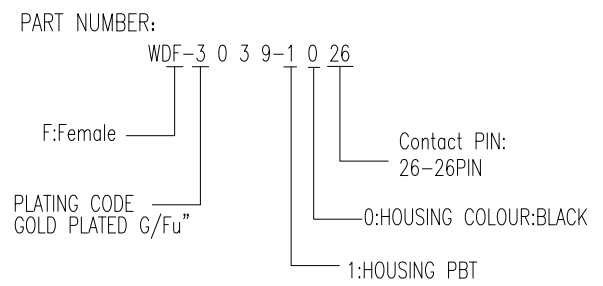

REV.	ECN. NO.	DRAWN	DATE	EC.content
A.0		Candy	10/20/2025	

 ECONN corporation 	⊗: QUALITY CONTROL ITEM	GENERAL TOLERANCE	PART NO.: WDF-3039-1026	
	APPROVED	.X± 0.38 X.*± 2'	TITLE: HDR (8.89) 母头	
	CHECKED	.XX± 0.25 .X*± 1'	锁铜螺丝	
	DRAWN	.XXX± 0.15	UNIT: mm	SCALE: 1:1
			REV.: A.0	DOCUMENT NO. : ZER0013/A.3

1 2 3 说明: △: 備註 ◇: 版本變更 ○: 尺寸序號 ■: 重點尺寸 ▼: CPK尺寸

SIZE: A4