


- NOTES:
 1.MATERIAL:
 HOUSING:HIGH TEMP. THERMOPLASTIC, UL 94V-0
 CONTACT:PHOSPHOR BRONZE,φ=0.46mm
 2.FINISH:
 CONTACT:30u"MIN. NICKEL UNDERPLATING ALL AREA,
 GOLD PLATING UNDERPLATING ALL AREA,
 3.OPERATING TEMPERATURE:-40°C~+85°C.
 4.JACK CAVITY CONFORMS TO FCC RULES AND
 REGULATIONS PART 68, SUBPART F
 5.THE SIZE OF THE PRODUCT MOUTH IS SUBJECT TO FCC REGULATIONS
 6.吊重要求达到5KG。(吊重方式: 拉力往水平0°, 45°, -45°, 左45°, 右45° 各拉1分钟;)

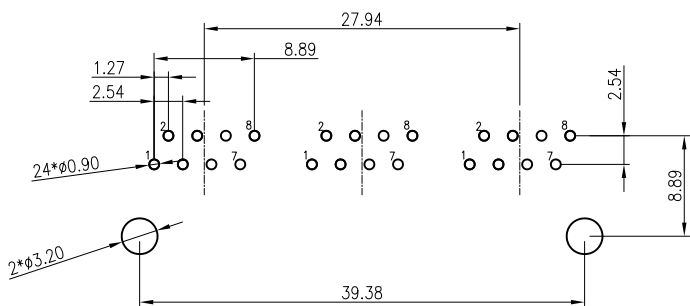

PCB LAYOUT TOP VIEW
 DIMENSIONS TOLERANCE:±0.05

PART NUMBER:

JD3A-0 0 1 1-0 0 B M
 Housing PBT
 BLACK
 香菇柱
 LED Code W/O LED
 Gold Plated G/Fu"
 Contact PIN 2.54mm

REV.	ECN. NO.	DRAWN	DATE	EC.content
A.0	NEW	Tony	11/25/2020	
A.1	EN2101003	ALLEN	01/07/2021	增加吊重管控
A.2	EN2101007	LiQiqing	01/20/2021	更改吊重5KG管控



⊗: QUALITY CONTROL ITEM	GENERAL TOLERANCE .X±0.38 X.'± 2' .XX±0.25 .X'± 1' .XXX±0.13	PART NO.: JD3A-0011-00BM
APPROVED		TITLE:RJ45 CONN. JD3A.1X3 CONNCTOR
CHECKED		W/OLED, 8P8C, 0.1u" MIN
DRAWN	UNIT: mm	SCALE: 1:1 SHEET: 1/1 REV.: A.2

說明: △:備註 ◇:版本變更 ⊙:尺寸序號 ■:重點尺寸 ▼:CPK尺寸

DOCUMENT NO. : ZER0013/A.3

SIZE: A4